




## CORRENTE SIMPLES

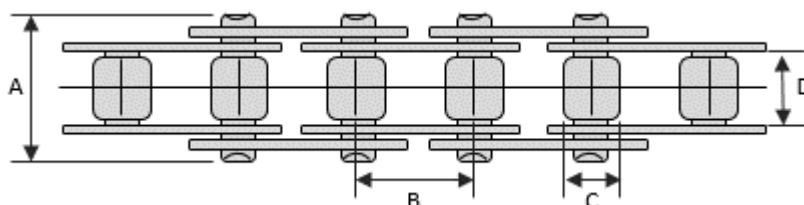

Referência ANSI E ISO	Referência ABNT	B x D	Passo	Entre placas	Diâmetro do rolo	Largura total	Alturas placas	Carga ruptura	Peso
			B	D	C	A	H		
		Pol	mm	mm	mm	mm	mm		
25-1	04C-1	1/4	6,35	3,18	3,30	9,70	5,70	450	0,12
35-1	06C-1	3/8	9,53	4,77	5,08	11,80	7,30	950	0,33
40-1	08A-1	1/2	12,70	7,95	7,92	16,40	10,20	1.700	0,60
50-1	10A-1	5/8	15,88	9,53	10,16	20,30	13,00	2.800	1,01
60-1	12A-1	3/4	19,05	12,70	11,91	25,50	18,00	3.800	1,43
80-1	16A-1	1	25,40	15,88	15,88	33,50	24,00	6.600	2,53
100-1	20A-1	1.1/4	31,75	19,05	19,05	40,40	29,60	10.800	4,02
120-1	24A-1	1.1/2	38,10	25,40	22,23	50,50	36,00	15.400	5,96
140-1	28A-1	1.3/4	44,45	25,40	25,40	54,50	42,00	20.800	7,75
160-1	32A-1	2	50,80	31,75	28,58	64,50	48,00	26.200	10,13
200-1	40A-1	2.1/2	63,50	38,10	39,67	78,50	57,20	43.000	16,10
240-1	48A-1	3	76,20	47,63	47,62	94,50	71,80	59.000	25,10
05B-1	05B-1	0,315	8,00	3,00	5,00	7,70	7,20	400	0,16
06B-1	06-B1	3/8	9,53	5,72	6,35	12,50	8,30	1.000	0,39
08B-1	08B-1	1/2	12,70	7,75	8,51	16,30	11,80	1.900	0,69
10B-1	10B-1	5/8	15,88	9,70	10,16	19,20	14,00	2.500	0,89
12B-1	12B-1	3/4	19,05	11,70	12,07	22,10	18,00	3.000	1,24
16B-1	16B-1	1	25,40	17,00	15,88	36,00	21,00	6.000	2,70
20B-1	20B-1	1.1/4	31,75	19,60	19,05	41,00	25,50	7.800	3,70
24B-1	24B-1	1.1/2	38,10	25,40	25,40	54,00	33,70	15.000	6,70
28B-1	28B-1	1.3/4	44,45	31,00	27,94	66,00	34,50	19.000	8,20
32B-1	32B-1	2	50,80	31,00	29,21	65,00	40,50	23.000	9,20
40B-1	40B-1	2.1/2	63,50	38,10	39,37	80,00	53,00	39.000	15,50
48B-1	48B-1	3	76,20	45,70	48,26	100,00	63,90	60.000	24,50