




CORRENTE DUPLA

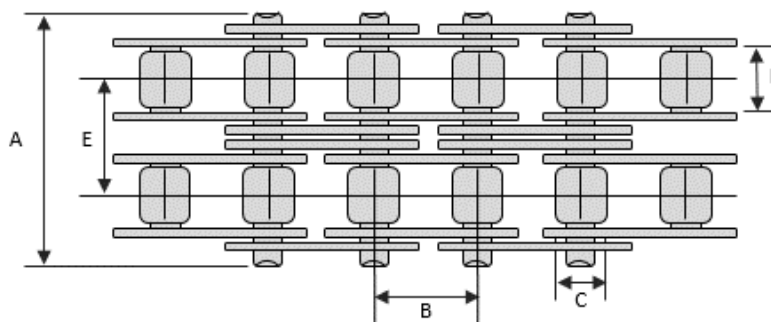

Referência ANSI E ISO	Referência ABNT	B x D	Passo	Entre placas	Diâmetro do rolo	Largura total	Passo transv.	Alturas placas	Carga ruptura	Peso
			B	D	C	A	E	H		
		Pol	mm	mm	mm	mm	mm	mm	kg	kg/m
35-2	06C-2	3/8	9,53	4,77	5,08	22,20	10,13	7,30	1.900	0,66
40-2	08A-2	1/2	12,70	7,95	7,92	30,80	14,38	10,20	3.400	1,20
50-2	10A-2	5/8	15,88	9,53	10,16	38,40	18,11	13,00	5.600	2,00
60-2	12A-2	3/4	19,05	12,70	11,91	48,50	22,78	18,00	7.600	2,77
80-2	16A-2	1	25,40	15,88	15,88	63,00	29,29	24,00	13.200	4,92
100-2	20A-2	1.1/4	31,75	19,05	19,05	76,50	35,76	29,60	21.600	7,75
120-2	24A-2	1.1/2	38,10	25,40	22,23	96,00	45,44	36,00	30.800	11,77
140-2	28A-2	1.3/4	44,45	25,40	25,40	103,50	48,87	42,00	41.600	15,05
160-2	32A-2	2	50,80	31,75	28,58	124,00	58,55	48,00	52.400	19,52
200-2	40A-2	2.1/2	63,50	38,10	39,67	150,30	71,55	57,20	86.000	31,44
240-2	48A-2	3	76,20	47,63	47,62	182,00	87,83	71,80	118.000	49,60
05B-2	05B-2	0,315	8,00	3,00	5,00	13,90	5,64	7,20	800	0,31
06B-2	06B-2	3/8	9,53	5,72	6,35	22,80	10,24	8,30	2.000	0,74
08B-2	08B-2	1/2	12,70	7,75	8,51	30,40	13,92	11,80	3.800	1,36
10B-2	10B-2	5/8	15,88	9,70	10,16	35,60	16,59	14,00	5.000	1,75
12B-2	12B-2	1	19,05	11,70	12,07	41,60	19,46	18,00	6.000	2,45
16B-2	16B-2	3/4	25,40	17,00	15,88	67,90	31,88	21,00	12.000	5,30
20B-2	20B-2	1.1/4	31,75	19,60	19,05	77,80	36,45	25,50	15.600	7,30
24B-2	24B-2	1.1/2	38,10	25,40	25,40	102,50	48,36	33,70	30.000	13,50
28B-2	28B-2	1.3/4	44,45	31,00	27,94	125,50	59,56	34,50	38.000	16,50
32B-2	32B-2	2	50,80	31,00	29,21	124,20	58,55	40,50	46.000	18,30

40B-2	40B-2	2.1/2	63,50	38,10	39,37	153,00	72,29	53,00	78.000	30,90
48B-2	48B-2	3	76,20	45,70	48,26	191,00	91,21	63,90	12.000	48,90