




CORRENTE TRIPLA

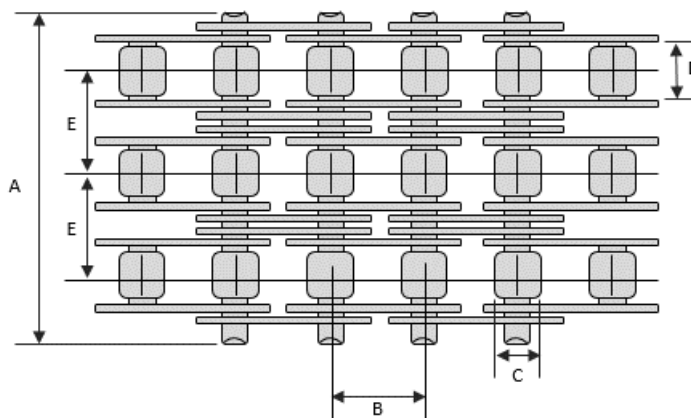

Referência ANSI E ISO	Referência ABNT	B x D	Passo	Entre placas	Diâmetro do rolo	Largura total	Passo transv.	Alturas placas	Carga ruptura	Peso
			B	D	C	A	E	H		
		Pol	mm	mm	mm	mm	mm	mm	kg	kg/m
35-3	06C-3	3/8	9,53	4,77	5,08	32,30	10,13	7,30	2.850	0,99
40-3	08A-3	1/2	12,70	7,95	7,92	45,20	14,38	10,20	5.100	1,80
50-3	10A-3	5/8	15,88	9,53	10,16	56,50	18,11	13,00	8.400	3,00
60-3	12A-3	3/4	19,05	12,70	11,91	71,50	22,78	18,00	11.400	4,20
80-3	16A-3	1	25,40	15,88	15,88	92,50	29,29	24,00	19.800	7,30
100-3	20A-3	1.1/4	31,75	19,05	19,05	113,00	35,76	29,60	32.400	11,62
120-3	24A-3	1.1/2	38,10	25,40	22,23	142,00	45,44	36,00	46.200	17,58
140-3	28A-3	1.3/4	44,45	25,40	25,40	153,00	48,87	42,00	62.400	22,35
160-3	32A-3	2	50,80	31,75	28,58	183,00	58,55	48,00	78.600	29,20
200-3	40A-3	2.1/2	63,50	38,10	39,67	222,30	71,55	57,20	129.000	46,94
240-3	48A-3	3	76,20	47,63	47,62	269,90	87,83	71,80	177.000	74,25
06B-3	06B-3	3/8	9,53	5,72	6,35	33,10	10,24	8,30	3.000	1,13
08B-3	08B-3	1/2	12,70	7,75	8,51	44,20	13,92	11,80	5.700	2,05
10B-3	10B-3	5/8	15,88	9,70	10,16	52,20	16,59	14,00	7.500	2,64
12B-3	12B-3	1	19,05	11,70	12,07	61,10	19,46	18,00	9.000	3,70
16B-3	16B-3	3/4	25,40	17,00	15,88	99,80	31,88	21,00	18.000	8,10
20B-3	20B-3	1.1/4	31,75	19,60	19,05	114,50	36,45	25,50	23.400	11,00
24B-3	24B-3	1.1/2	38,10	25,40	25,40	151,30	48,36	33,70	45.000	20,50
28B-3	28B-3	1.3/4	44,45	31,00	27,94	186,00	59,56	34,50	57.000	25,40

32B-3	32B-3	2	50,80	31,00	29,21	182,30	58,55	40,50	69.000	27,50
40B-3	40B-3	2.1/2	63,50	38,10	39,37	225,50	72,29	53,00	117.000	47,50
48B-3	48B-3	3,00	76,20	45,70	48,26	282,00	91,21	63,90	180.000	75,50